
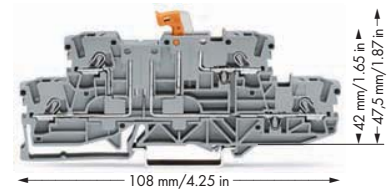
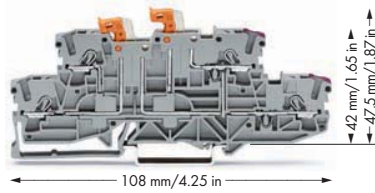


Double-Deck Disconnect Terminal Blocks for Test and Measurement

2.5 (4) mm², 2002 Series

0.25 - 2.5 (4) mm ² ① 400 V/6 kV/3 ② I _N 16 A	AWG 22 - 12 300 V, 15 A ③ 300 V, 15 A ④	0.25 - 2.5 (4) mm ² ① 400 V/6 kV/3 ② I _N 16 A	AWG 22 - 12 300 V, 15 A ③ 300 V, 15 A ④	0.25 - 2.5 (4) mm ² ① 400 V/6 kV/3 ② I _N 16 A	AWG 22 - 12 300 V, 15 A ③ 300 V, 15 A ④
Terminal block width 5.2 mm / 0.205 in 10 - 12 mm / 0.43 in ⑤		Terminal block width 5.2 mm / 0.205 in 10 - 12 mm / 0.43 in ⑤		Terminal block width 5.2 mm / 0.205 in 10 - 12 mm / 0.43 in ⑤	

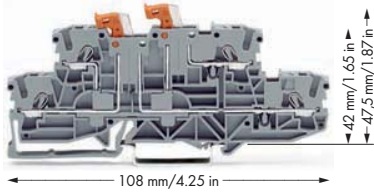




Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
Double-deck, double-disconnect terminal block, with 2 movable knife disconnects, gray housing		Double-deck, double-disconnect terminal block, with 2 movable knife disconnects, lower and upper decks internally commoned on right side and with violet marking, gray housing		Double-deck disconnect terminal block, with movable knife disconnect, same profile as double-deck, double-disconnect terminal block, gray housing	
⊙ L/L	2002-2951 50	⊙ L/L	2002-2958 50	⊙ L/L	2002-2971 50
⊙ N/L	2002-2952 50			⊙ N/L	2002-2972 50
Double-deck, double-disconnect terminal block, with 2 movable knife disconnects, blue housing		Double-deck, double-disconnect terminal block, with 2 movable knife disconnects, lower and upper decks internally commoned on right side and with violet marking, blue housing		Double-deck disconnect terminal block, with movable knife disconnect, same profile as double-deck, double-disconnect terminal block, blue housing	
● N/N	2002-2954 50	● N/N	2002-2959 50	● N/N	2002-2974 50




2002 Series Accessories

Appropriate marking systems: WMB/Marking strips (see Section 13)

End and intermediate plate, 1 mm thick orange 2002-2992 100 (4x25) gray 2002-2991 100 (4x25)	Push-in type jumper bar, insulated, I _N 25 A, light gray from 1 to 3 2002-433 200 (8x25) from 1 to 4 2002-434 200 (8x25) from 1 to 5 2002-435 100 (4x25) from 1 to 6 2002-436 100 (4x25) from 1 to 7 2002-437 100 (4x25) from 1 to 8 2002-438 100 (4x25) from 1 to 9 2002-439 100 (4x25) from 1 to 10 2002-440 100 (4x25)	Protective warning marker, with high-voltage symbol, black, for 5 terminal blocks yellow 2002-115 100 (4x25)
Insulation stop, 5 pcs/strip, 0.25 - 0.5 mm ² light gray 2002-171 200 (8x25)		Modular TOPJOB®S connector, ④ can be snapped together, for jumper contact slot gray 2002-511 100 (4x25)
Insulation stop, 5 pcs/strip, 0.75 - 1 mm ² dark gray 2002-172 200 (8x25)		Spacer module, can be snapped together, e.g., for bridging commoned terminal blocks gray 2002-549 100 (4x25)
Push-in type jumper bar, insulated, ④ I _N 25 A, light gray 2-way 2002-402 200 (8x25) 3-way 2002-403 200 (8x25) 4-way 2002-404 200 (8x25) 5-way 2002-405 100 (4x25) 6-way 2002-406 100 (4x25) 7-way 2002-407 100 (4x25) 8-way 2002-408 100 (4x25) 9-way 2002-409 100 (4x25) 10-way 2002-410 100 (4x25)	Staggered jumper, ④ insulated, I _N 25 A, light gray 2-way 2002-472 100 (4x25) 3-way 2002-473 100 (4x25) 4-way 2002-474 100 (4x25) 5-way 2002-475 50 (2x25) 6-way 2002-476 50 (2x25) 7-way 2002-477 50 (2x25) 8-way 2002-478 50 (2x25) 9-way 2002-479 50 (2x25) 10-way 2002-480 50 (2x25) 11-way 2002-481 50 (2x25) 12-way 2002-482 50 (2x25)	End plate, for modular TOPJOB®S connectors, 1.5 mm thick gray 2002-541 100 (4x25)
Push-in type wire jumper, ④ insulated, I _N 16 A, wire size 1.5 mm ² L = 60 mm 2009-412 100 (10x10) L = 110 mm 2009-414 100 (10x10) L = 250 mm 2009-416 100 (10x10)	Adjacent jumper for continuous commoning, ④ insulated, I _N 25 A, light gray 2-way 2002-400 100 (4x25)	Test plug, with 500 mm cable, 2 mm Ø red 210-136 50
		Test plug adapter, for test plug 4 mm Ø gray 2009-174 100 (4x25)
		Testing tap, for max. 2.5 mm ² gray 2009-182 100 (4x25)
		Banana plug, for socket 4 mm Ø, color mixed 215-111 50

Disconnect Terminal Blocks for Test and Measurement, Through Terminal Blocks of Same Profile 2.5 (4) mm², 2002 Series

<p>0.25 - 2.5 (4) mm² ① AWG 22 - 12 400 V/6 kV/3 ② I_N 16 A</p> <p>Terminal block width 5.2 mm / 0.205 in  10 - 12 mm / 0.43 in ③</p>	<p>0.25 - 2.5 (4) mm² ① AWG 22 - 12 400 V/6 kV/3 ② I_N 16 A</p> <p>Terminal block width 5.2 mm / 0.205 in  10 - 12 mm / 0.43 in ③</p>	<p>0.25 - 2.5 (4) mm² ① AWG 22 - 12 400 V/6 kV/3 ② I_N 16 A</p> <p>Terminal block width 5.2 mm / 0.205 in  10 - 12 mm / 0.43 in ③</p>
--	--	--



Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
2-conductor disconnect terminal block for test and measurement, with test point, orange disconnect link		2-conductor disconnect terminal block for test and measurement with mechanical interlock, with test point, orange disconnect link		2-conductor through terminal block, with test point, same profile as 2-conductor disconnect terminal block	
○ gray	2002-1671 50	○ gray	2002-1671/401-000 50	○ gray	2002-1601 50
● blue	2002-1674 50	● blue	2002-1674/401-000 50	● blue	2002-1604 50
● orange	2002-1672 50	● orange	2002-1672/401-000 50	● orange	2002-1602 50
Other terminal blocks with the same profile:					
		Carrier		2002-1661 Page 114	
		Fuse		2002-1681 Page 98	










2002 Series Accessories




Appropriate marking systems: WMB/Marking strips/WMB Inline (see Section 13)









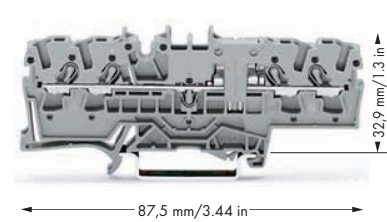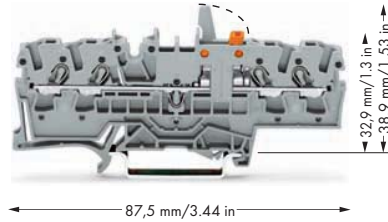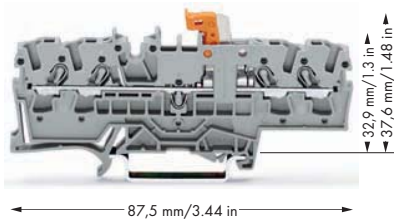
<p>End and intermediate plate, 1 mm thick</p> <p>orange 2002-1692 100 (4x25) gray 2002-1691 100 (4x25)</p>	<p>Protective warning marker, with high-voltage symbol, black, for 5 terminal blocks</p> <p>yellow 2002-115 100 (4x25)</p>	<p>Customized staggered jumper, insulated, I_N 25 A, light gray</p> <p>1-3 2002-473/011-000 100 (4x25) 1-3-5 2002-475/011-000 1-3-5-7 2002-477/011-000 1-3-5-7-9 2002-479/011-000 1-3-5-7-9-11 2002-481/011-000 50 (2x25)</p>
<p>Insulation stop, 5 pcs/strip, 0.25 - 0.5 mm²</p> <p>light gray 2002-171 200 (8x25)</p>	<p>Push-in type jumper bar, insulated, I_N 25 A, light gray</p> <p>from 1 to 3 2002-433 200 (8x25) from 1 to 4 2002-434 200 (8x25) from 1 to 5 2002-435 100 (4x25) from 1 to 6 2002-436 100 (4x25) from 1 to 7 2002-437 100 (4x25) from 1 to 8 2002-438 100 (4x25) from 1 to 9 2002-439 100 (4x25) from 1 to 10 2002-440 100 (4x25)</p>	
<p>Insulation stop, 5 pcs/strip, 0.75 - 1 mm²</p> <p>dark gray 2002-172 200 (8x25)</p>	<p>Staggered jumper, insulated, I_N 25 A, light gray</p> <p>2-way 2002-472 100 (4x25) 3-way 2002-473 100 (4x25) 4-way 2002-474 100 (4x25) 5-way 2002-475 50 (2x25) 6-way 2002-476 50 (2x25) 7-way 2002-477 50 (2x25) 8-way 2002-478 50 (2x25) 9-way 2002-479 50 (2x25) 10-way 2002-480 50 (2x25) 11-way 2002-481 50 (2x25) 12-way 2002-482 50 (2x25)</p>	<p>Adjacent jumper for continuous commoning, insulated, I_N 25 A, light gray</p> <p>2-way 2002-400 100 (4x25)</p>
<p>Push-in type jumper bar, insulated, I_N 25 A, light gray</p> <p>2-way 2002-402 200 (8x25) 3-way 2002-403 200 (8x25) 4-way 2002-404 200 (8x25) 5-way 2002-405 100 (4x25) 6-way 2002-406 100 (4x25) 7-way 2002-407 100 (4x25) 8-way 2002-408 100 (4x25) 9-way 2002-409 100 (4x25) 10-way 2002-410 100 (4x25)</p>	<p>Modular TOPJOB®S connector, can be snapped together, for jumper contact slot, gray</p> <p>2002-511 100 (4x25)</p>	<p>Spacer module, can be snapped together, e.g., for bridging commoned terminal blocks, gray</p> <p>2002-549 100 (4x25)</p>
<p>Push-in type wire jumper, insulated, I_N 16 A, wire size 1.5 mm²</p> <p>L = 60 mm 2009-412 100 (10x10) L = 110 mm 2009-414 100 (10x10) L = 250 mm 2009-416 100 (10x10)</p>	<p>End plate, for modular TOPJOB®S connectors, 1.5 mm thick, gray</p> <p>2002-541 100 (4x25)</p>	<p>TOPJOB®S test plug module, can be snapped together, gray</p> <p>2002-611 100 (4x25)</p>

For list of approvals and user guide, see pages 634 to 637.

Disconnect Terminal Blocks for Test and Measurement, Through Terminal Blocks of Same Profile 2.5 (4) mm², 2002 Series
















0.25 - 2.5 (4) mm² ① 400 V/6 kV/3 ② I_N 16 A Terminal block width 5.2 mm / 0.205 in  10 - 12 mm / 0.43 in ③	AWG 22 - 12 300 V, 15 A  300 V, 15 A 	0.25 - 2.5 (4) mm² ① 400 V/6 kV/3 ② I_N 16 A Terminal block width 5.2 mm / 0.205 in  10 - 12 mm / 0.43 in ③	AWG 22 - 12 300 V, 15 A  300 V, 15 A 	0.25 - 2.5 (4) mm² ① 400 V/6 kV/3 ② I_N 16 A Terminal block width 5.2 mm / 0.205 in  10 - 12 mm / 0.43 in ③	AWG 22 - 12 300 V, 15 A  300 V, 15 A 
--	--	--	--	--	--



Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
4-conductor disconnect terminal block for test and measurement, with test point, orange disconnect link		4-conductor disconnect terminal block for test and measurement with mechanical interlock, with test point, orange disconnect link		4-conductor through terminal block, with test point, same profile as 4-conductor disconnect terminal block	
 gray	2002-1871 50	 gray	2002-1871/401-000 50	 gray	2002-1801 50
 blue	2002-1874 50	 blue	2002-1874/401-000 50	 blue	2002-1804 50
 orange	2002-1872 50	 orange	2002-1872/401-000 50	 orange	2002-1802 50
Other terminal blocks with the same profile:					
		Carrier		2002-1861 Page 114	
		Fuse		2002-1881 Page 98	

2002 Series Accessories


Appropriate marking systems: WMB/Marking strips/WMB Inline (see Section 13)

End and intermediate plate, 1 mm thick  orange 2002-1892 100 (4x25)  gray 2002-1891 100 (4x25)	Protective warning marker, with high-voltage symbol, black,  for 5 terminal blocks yellow 2002-115 100 (4x25)	Customized staggered jumper,  insulated, I _N 25 A, light gray 1-3 2002-473/011-000 100 (4x25) 1-3-5 2002-475/011-000 1-3-5-7 2002-477/011-000 1-3-5-7-9 2002-479/011-000 1-3-5-7-9-11 2002-481/011-000 50 (2x25)
Insulation stop,  5 pcs/strip, 0.25 - 0.5 mm ² light gray 2002-171 200 (8x25)	Push-in type jumper bar, insulated,  I _N 25 A, light gray from 1 to 3 2002-433 200 (8x25) from 1 to 4 2002-434 200 (8x25) from 1 to 5 2002-435 100 (4x25) from 1 to 6 2002-436 100 (4x25) from 1 to 7 2002-437 100 (4x25) from 1 to 8 2002-438 100 (4x25) from 1 to 9 2002-439 100 (4x25) from 1 to 10 2002-440 100 (4x25)	Adjacent jumper for continuous commoning,  ④ insulated, I _N 25 A, light gray 2-way 2002-400 100 (4x25)
Insulation stop,  5 pcs/strip, 0.75 - 1 mm ² dark gray 2002-172 200 (8x25)	Staggered jumper,  ④ insulated, I _N 25 A, light gray 2-way 2002-472 100 (4x25) 3-way 2002-473 100 (4x25) 4-way 2002-474 100 (4x25) 5-way 2002-475 50 (2x25) 6-way 2002-476 50 (2x25) 7-way 2002-477 50 (2x25) 8-way 2002-478 50 (2x25) 9-way 2002-479 50 (2x25) 10-way 2002-480 50 (2x25) 11-way 2002-481 50 (2x25) 12-way 2002-482 50 (2x25)	Modular TOPJOB®S connector,  ④ can be snapped together, for jumper contact slot gray 2002-511 100 (4x25)
Push-in type jumper bar, insulated,  ④ I _N 25 A, light gray 2-way 2002-402 200 (8x25) 3-way 2002-403 200 (8x25) 4-way 2002-404 200 (8x25) 5-way 2002-405 100 (4x25) 6-way 2002-406 100 (4x25) 7-way 2002-407 100 (4x25) 8-way 2002-408 100 (4x25) 9-way 2002-409 100 (4x25) 10-way 2002-410 100 (4x25)	Spacer module, can be snapped together,  e.g., for bridging commoned terminal blocks gray 2002-549 100 (4x25)	End plate,  for modular TOPJOB®S connectors, 1.5 mm thick gray 2002-541 100 (4x25)
Push-in type wire jumper,  ④ insulated, I _N 16 A, wire size 1.5 mm ² L = 60 mm 2009-412 100 (10x10) L = 110 mm 2009-414 100 (10x10) L = 250 mm 2009-416 100 (10x10)	TOPJOB®S test plug module,  ④ can be snapped together gray 2002-611 100 (4x25)	

For list of approvals and user guide, see pages 634 to 637.

TOPJOB® Fuse Terminal Blocks 2.5 (4) mm² 2002 Series




0.25 - 2.5 (4) mm ² ① 400 V/6 kV/3 ② I _N 10 A ③ Terminal block width 5.2 mm / 0.205 in 10 - 12 mm / 0.43 in ④	AWG 22 - 12 300 V, 10 A ⑤ 300 V, 10 A ⑥	0.25 - 2.5 (4) mm ² ① 400 V/6 kV/3 ② I _N 10 A ③ Terminal block width 5.2 mm / 0.205 in 10 - 12 mm / 0.43 in ④	AWG 22 - 12 300 V, 10 A ⑤ 300 V, 10 A ⑥
---	---	---	---



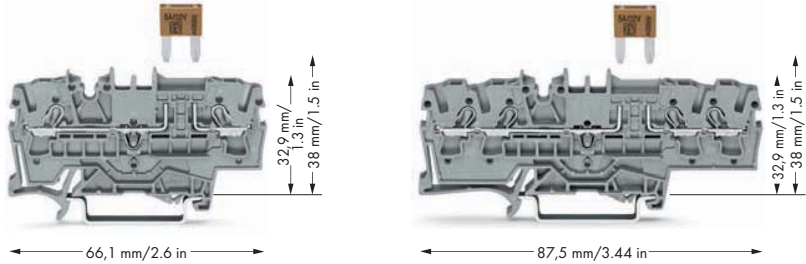


Item No.	Pack. Unit	Item No.	Pack. Unit	Accessories	
2-conductor fuse terminal block, with test point, for blade-style fuses acc. to DIN 72581-3f, ISO 8820-3		4-conductor fuse terminal block, with test point, for blade-style fuses acc. to DIN 72581-3f, ISO 8820-3			
gray 2002-1681	50	gray 2002-1881	50	Staggered jumper, insulated, I _N 25 A, light gray 2-way 2002-472 100 (4x25) 3-way 2002-473 100 (4x25) 4-way 2002-474 100 (4x25) 5-way 2002-475 50 (2x25) 6-way 2002-476 50 (2x25) 7-way 2002-477 50 (2x25) 8-way 2002-478 50 (2x25) 9-way 2002-479 50 (2x25) 10-way 2002-480 50 (2x25) 11-way 2002-481 50 (2x25) 12-way 2002-482 50 (2x25)	
Blade-style fuses are not offered by WAGO		Blade-style fuses are not offered by WAGO			
Other terminal blocks with the same profile: Through 2002-1601 Page 94		Other terminal blocks with the same profile: Through 2002-1801 Page 96			
Item-Specific Accessories		Item-Specific Accessories			
End and intermediate plate, 1 mm thick orange 2002-1692 100 (4x25) gray 2002-1691 100 (4x25)		End and intermediate plate, 1 mm thick orange 2002-1892 100 (4x25) gray 2002-1891 100 (4x25)			
2002 Series Accessories Appropriate marking systems: WMB/Marking strips/WMB Inline (see Section 13)					
Insulation stop, 5 pcs/strip, 0.25 - 0.5 mm ² light gray 2002-171 200 (8x25)		Push-in type jumper bar, insulated, I _N 25 A, light gray from 1 to 3 2002-433 200 (8x25) from 1 to 4 2002-434 200 (8x25) from 1 to 5 2002-435 100 (4x25) from 1 to 6 2002-436 100 (4x25) from 1 to 7 2002-437 100 (4x25) from 1 to 8 2002-438 100 (4x25) from 1 to 9 2002-439 100 (4x25) from 1 to 10 2002-440 100 (4x25)		Adjacent jumper for continuous commoning, insulated, I _N 25 A, light gray 2-way 2002-400 100 (4x25)	
Insulation stop, 5 pcs/strip, 0.75 - 1 mm ² dark gray 2002-172 200 (8x25)		Push-in type wire jumper, insulated, I _N 16 A, wire size 1.5 mm ² L = 60 mm 2009-412 100 (10x10) L = 110 mm 2009-414 100 (10x10) L = 250 mm 2009-416 100 (10x10)		Modular TOPJOB®S connector, can be snapped together, for jumper contact slot gray 2002-511 100 (4x25)	
Push-in type jumper bar, insulated, I _N 25 A, light gray 2-way 2002-402 200 (8x25) 3-way 2002-403 200 (8x25) 4-way 2002-404 200 (8x25) 5-way 2002-405 100 (4x25) 6-way 2002-406 100 (4x25) 7-way 2002-407 100 (4x25) 8-way 2002-408 100 (4x25) 9-way 2002-409 100 (4x25) 10-way 2002-410 100 (4x25)		Protective warning marker, with high-voltage symbol, black, for 5 terminal blocks yellow 2002-115 100 (4x25)		Spacer module, can be snapped together, e.g., for bridging commoned terminal blocks gray 2002-549 100 (4x25)	
Double-deck marker carrier, pivoting gray 2002-121 50 (2x25)		Test plug, with 500 mm cable, 2 mm Ø red 210-136 50		End plate, for modular TOPJOB®S connectors, 1.5 mm thick gray 2002-541 100 (4x25)	
		Banana plug, for socket 4 mm Ø, color mixed 215-111 50		TOPJOB®S L-test plug module, can be snapped together gray 2002-611 100 (4x25)	
				Test plug adapter, for test plug 4 mm Ø gray 2009-174 100 (4x25)	
				Testing tap, for max. 2.5 mm ² gray 2009-182 100 (4x25)	
				WMB Multi marking system, 10 strips with 10 markers per card, stretchable 5 - 5.2 mm plain 793-5501 5	

For list of approvals and user guide, see pages 634 to 637.

Fuse Disconnect Terminal Blocks with Pivoting Fuse Holder 2.5 (4) mm² for Miniature Metric Fuses 5 x 20 mm, 2002 Series

<p>0.25 - 2.5 (4) mm² ① AWG 22 - 12 250 V/6 kV/3 ② I_N 6.3 A</p> <p>Terminal block width 6.2 mm / 0.244 in  10 - 12 mm / 0.43 in ③</p>	<p>0.25 - 2.5 (4) mm² ① AWG 22 - 12 250 V/6 kV/3 ② I_N 6.3 A</p> <p>Terminal block width 6.2 mm / 0.244 in  10 - 12 mm / 0.43 in ③</p>	<p>0.25 - 2.5 (4) mm² ① AWG 22 - 12 250 V/6 kV/3 ② I_N 6.3 A</p> <p>Terminal block width 6.2 mm / 0.244 in  10 - 12 mm / 0.43 in ③</p>
---	---	---

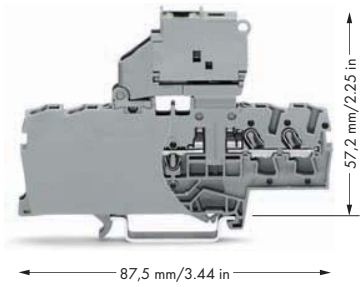

Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
2-conductor fuse disconnect terminal block with pivoting fuse holder, for miniature metric fuses 5 x 20 mm, without blown fuse indication Nominal voltage and current are given by the fuse.		2-conductor fuse disconnect terminal block with pivoting fuse holder, for miniature metric fuses 5 x 20 mm, with blown fuse indication by LED, gray Nominal voltage and current are given by the LED or fuse. Leakage current in case of blown fuse: LED 2 mA		4-conductor fuse disconnect terminal block with pivoting fuse holder, for miniature metric fuses 5 x 20 mm, without blown fuse indication Nominal voltage and current are given by the fuse.	
● gray	2002-1611 50	● 12 - 30 V	2002-1611/1000-541 50	● gray	2002-1811 50
		● 30 - 65 V	2002-1611/1000-542 50		
		● 230 V	2002-1611/1000-836 50		
		● 120 V	2002-1611/1000-867 50		




Accessories

Appropriate marking systems: WMB/Marking strips (see Section 13)

<p>End plate for fuse terminal blocks, 2 mm thick orange 2002-992 100 (4x25) gray 2002-991 100 (4x25)</p>	<p>Push-in type jumper bar, insulated, I_N 32 A, light gray</p> <p>2-way 2004-402 200 (8x25) 3-way 2004-403 200 (8x25) 4-way 2004-404 100 (4x25) 5-way 2004-405 100 (4x25) 6-way 2004-406 100 (4x25) 7-way 2004-407 100 (4x25) 8-way 2004-408 100 (4x25) 9-way 2004-409 100 (4x25) 10-way 2004-410 100 (4x25)</p>	<p>Push-in type jumper bar, insulated, I_N 32 A, light gray</p> <p>from 1 to 3 2004-433 200 (8x25) from 1 to 4 2004-434 200 (8x25) from 1 to 5 2004-435 100 (4x25) from 1 to 6 2004-436 100 (4x25) from 1 to 7 2004-437 100 (4x25) from 1 to 8 2004-438 100 (4x25) from 1 to 9 2004-439 100 (4x25) from 1 to 10 2004-440 100 (4x25)</p>
<p>Insulation stop, 5 pcs/strip, 0.25 - 0.5 mm² light gray 2002-171 200 (8x25)</p>		
<p>Insulation stop, 5 pcs/strip, 0.75 - 1 mm² dark gray 2002-172 200 (8x25)</p>		
<p>Push-in type wire jumper, ④ insulated, I_N 16 A, wire size 1.5 mm² L = 60 mm 2009-412 100 (10x10) L = 110 mm 2009-414 100 (10x10) L = 250 mm 2009-416 100 (10x10)</p>	<p>Protective warning marker, with high-voltage symbol, black, for 5 terminal blocks yellow 2002-115 100 (4x25)</p>	

Disconnect Terminal Blocks for Test and Measurement without and with Mechanical Interlock with Additional Jumper Position 2.5 (4) mm², 2002 Series

<p>0.25 - 2.5 (4) mm² ① AWG 22 - 12 400 V/6 kV/3 ② I_N 16 A</p> <p>Terminal block width 5.2 mm / 0.205 in 10 - 12 mm / 0.43 in ③</p>	<p>0.25 - 2.5 (4) mm² ① AWG 22 - 12 400 V/6 kV/3 ② I_N 16 A</p> <p>Terminal block width 5.2 mm / 0.205 in 10 - 12 mm / 0.43 in ③</p>	<p>0.25 - 2.5 (4) mm² ① AWG 22 - 12 400 V/6 kV/3 ② I_N 16 A</p> <p>Terminal block width 5.2 mm / 0.205 in 10 - 12 mm / 0.43 in ③</p>
---	---	---






Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
2-conductor disconnect terminal block for test and measurement, with test point, orange disconnect link, with additional jumper position		2-conductor disconnect terminal block for test and measurement with mechanical interlock, with test point, orange disconnect link, with additional jumper position		2-conductor through terminal block, with test point, with additional jumper position, same profile as 2-conductor disconnect terminal block	
gray 2002-1971	50	gray 2002-1971/401-000	50	gray 2002-1901	50
blue 2002-1974	50	orange 2002-1972/401-000	50	blue 2002-1904	50
orange 2002-1972	50	blue 2002-1974/401-000	50	orange 2002-1902	50
				2-conductor ground terminal block	
				green-yellow 2002-1907 50	
				Other terminal blocks with the same profile:	
				Carrier	2002-1961 Page 114
				Fuse	2002-1981 Page 105


2002 Series Accessories

Appropriate marking systems: WMB/Marking strips/WMB Inline (see Section 13)

<p>End and intermediate plate, 1 mm thick</p> <p>orange 2002-1992 100 (4x25) gray 2002-1991 100 (4x25)</p>	<p>Push-in type jumper bar, insulated,</p> <p>I_N 25 A, light gray from 1 to 3 2002-433 200 (8x25) from 1 to 4 2002-434 200 (8x25) from 1 to 5 2002-435 100 (4x25) from 1 to 6 2002-436 100 (4x25) from 1 to 7 2002-437 100 (4x25) from 1 to 8 2002-438 100 (4x25) from 1 to 9 2002-439 100 (4x25) from 1 to 10 2002-440 100 (4x25)</p>	<p>Protective warning marker, with high-voltage symbol, black, for 5 terminal blocks yellow 2002-115 100 (4x25)</p>
<p>Insulation stop,</p> <p>5 pcs/strip, 0.25 - 0.5 mm² light gray 2002-171 200 (8x25)</p>		<p>Test plug adapter, for test plug 4 mm Ø gray 2009-174 100 (4x25)</p>
<p>Insulation stop,</p> <p>5 pcs/strip, 0.75 - 1 mm² dark gray 2002-172 200 (8x25)</p>		<p>Testing tap, for max. 2.5 mm² gray 2009-182 100 (4x25)</p>
<p>Push-in type jumper bar, insulated,</p> <p>④ I_N 25 A, light gray 2-way 2002-402 200 (8x25) 3-way 2002-403 200 (8x25) 4-way 2002-404 200 (8x25) 5-way 2002-405 100 (4x25) 6-way 2002-406 100 (4x25) 7-way 2002-407 100 (4x25) 8-way 2002-408 100 (4x25) 9-way 2002-409 100 (4x25) 10-way 2002-410 100 (4x25)</p>	<p>Staggered jumper,</p> <p>④ insulated, I_N 25 A, light gray 2-way 2002-472 100 (4x25) 3-way 2002-473 100 (4x25) 4-way 2002-474 100 (4x25) 5-way 2002-475 50 (2x25) 6-way 2002-476 50 (2x25) 7-way 2002-477 50 (2x25) 8-way 2002-478 50 (2x25) 9-way 2002-479 50 (2x25) 10-way 2002-480 50 (2x25) 11-way 2002-481 50 (2x25) 12-way 2002-482 50 (2x25)</p>	<p>Modular TOPJOB®S connector,</p> <p>④ can be snapped together, for jumper contact slot gray 2002-511 100 (4x25)</p>
<p>Push-in type wire jumper,</p> <p>④ insulated, I_N 16 A, wire size 1.5 mm² L = 60 mm 2009-412 100 (10x10) L = 110 mm 2009-414 100 (10x10) L = 250 mm 2009-416 100 (10x10)</p>	<p>Adjacent jumper for continuous commoning,</p> <p>④ insulated, I_N 25 A, light gray 2-way 2002-400 100 (4x25)</p>	<p>Spacer module, can be snapped together, e.g., for bridging commoned terminal blocks gray 2002-549 100 (4x25)</p>
		<p>End plate, for modular TOPJOB®S connectors, 1.5 mm thick gray 2002-541 100 (4x25)</p>
		<p>TOPJOB®S test plug module,</p> <p>④ can be snapped together gray 2002-611 100 (4x25)</p>
		<p>Test plug, with 500 mm cable, 2 mm Ø red 210-136 50</p>

TOPJOB® Fuse Terminal Blocks 2.5 (4) mm² 2002 Series





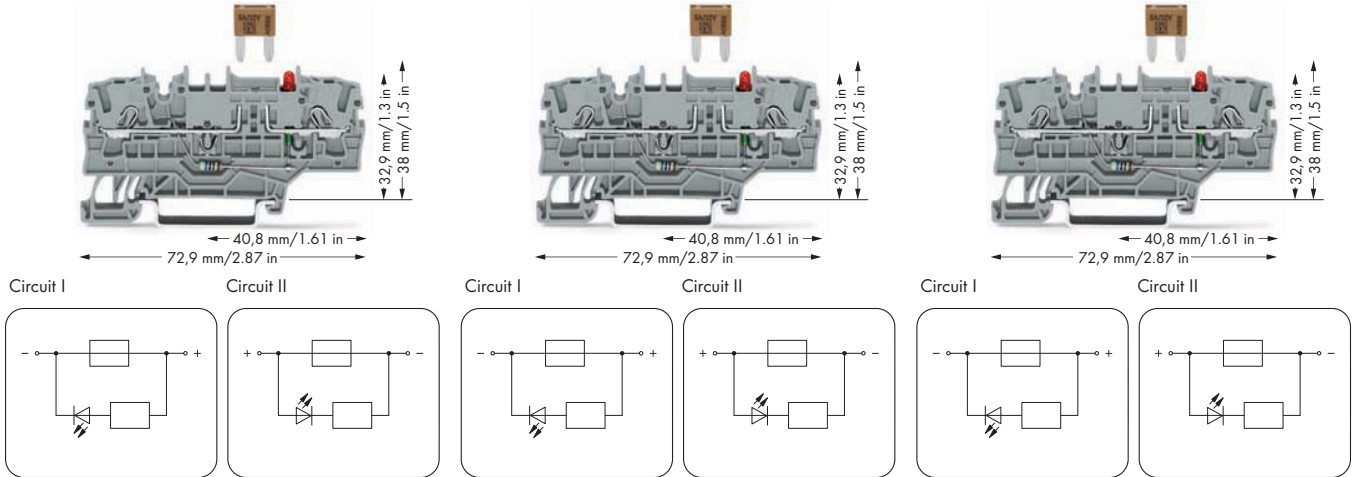




0.25 - 2.5 (4) mm² ① AWG 22 - 12 400 V/6 kV/3 ② I_N 10 A Terminal block width 5.2 mm / 0.205 in  10 - 12 mm / 0.43 in ③	0.25 - 2.5 (4) mm² ① AWG 22 - 12 400 V/6 kV/3 ② I_N 10 A Terminal block width 5.2 mm / 0.205 in  10 - 12 mm / 0.43 in ③	0.25 - 2.5 (4) mm² ① AWG 22 - 12 400 V/6 kV/3 ② I_N 10 A Terminal block width 5.2 mm / 0.205 in  10 - 12 mm / 0.43 in ③
--	--	--




Item No.	Pack. Unit	Item No.	Pack. Unit	Item No.	Pack. Unit
2-conductor fuse terminal block for mini-automotive blade-style fuses, 12V, with test point, with blown fuse indication by LED, LED power consumption: 4.8 mA, gray Nominal voltage and current are given by the LED or fuse. Blade-style fuses, please note touchproof protection for 42V and higher.		2-conductor fuse terminal block for mini-automotive blade-style fuses, 24 V, with test point, with blown fuse indication by LED, LED power consumption: 4.8 mA, gray Nominal voltage and current are given by the LED or fuse. Blade-style fuses, please note touchproof protection for 42V and higher.		2-conductor fuse terminal block for mini-automotive blade-style fuses, 48 V, with test point, with blown fuse indication by LED, LED power consumption: 4.8 mA, gray Nominal voltage and current are given by the LED or fuse. Blade-style fuses, please note touchproof protection for 42V and higher.	
Ⓐ Circuit I 2002-1981/1000-429 50 Ⓑ Circuit II 2002-1981/1000-449 50		Ⓐ Circuit I 2002-1981/1000-413 50 Ⓑ Circuit II 2002-1981/1000-434 50		Ⓐ Circuit I 2002-1981/1000-414 50 Ⓑ Circuit II 2002-1981/1000-435 50	
Other terminal blocks with the same profile: Through 2002-1901 Page 102					


2002 Series Accessories

Appropriate marking systems: WMB/Marking strips/WMB Inline
(see Section 13)

End and intermediate plate, 1 mm thick  orange 2002-1992 100 (4x25)  gray 2002-1991 100 (4x25)	Push-in type wire jumper,  ④ insulated, I _N 16 A, wire size 1.5 mm ² L = 60 mm 2009-412 100 (10x10) L = 110 mm 2009-414 100 (10x10) L = 250 mm 2009-416 100 (10x10)	Staggered jumper,  ④ insulated, I _N 25 A, light gray 2-way 2002-472 100 (4x25) 3-way 2002-473 100 (4x25) 4-way 2002-474 100 (4x25) 5-way 2002-475 50 (2x25) 6-way 2002-476 50 (2x25) 7-way 2002-477 50 (2x25) 8-way 2002-478 50 (2x25) 9-way 2002-479 50 (2x25) 10-way 2002-480 50 (2x25) 11-way 2002-481 50 (2x25) 12-way 2002-482 50 (2x25)
Insulation stop,  5 pcs/strip, 0.25 - 0.5 mm ² light gray 2002-171 200 (8x25)	Adjacent jumper for continuous commoning,  ④ insulated, I _N 25 A, light gray 2-way 2002-400 100 (4x25)	
Insulation stop,  5 pcs/strip, 0.75 - 1 mm ² dark gray 2002-172 200 (8x25)	Push-in type jumper bar, insulated,  ④ I _N 25 A, light gray 2-way 2002-402 200 (8x25) 3-way 2002-403 200 (8x25) 4-way 2002-404 200 (8x25) 5-way 2002-405 100 (4x25) 6-way 2002-406 100 (4x25) 7-way 2002-407 100 (4x25) 8-way 2002-408 100 (4x25) 9-way 2002-409 100 (4x25) 10-way 2002-410 100 (4x25)	Protective warning marker,  with high-voltage symbol, black, for 5 terminal blocks yellow 2002-115 100 (4x25)

For list of approvals and user guide, see pages 634 to 637.



0.25 - 2.5 [4] mm² ① AWG 22 - 12
 400 V/6 kV/3 ②
 I_N 10 A
 Terminal block width 5.2 mm / 0.205 in
 10 - 12 mm / 0.43 in ③





- ① Conductor sizes: 0.25 mm² - 4 mm² "s + f-st"; Push-in conductor sizes: 0.75 mm² - 4 mm² "s" and 0.75 mm² - 2.5 mm² "insulated ferrules, 12 mm"
- ② 400 V = rated voltage
 6 kV = rated surge voltage
 3 = pollution degree
 (see Section 14)
- ③ Strip length, see packaging or instructions.
- ④ See application notes for:
 Colored push-in type jumper bars, page 139
 Staggered jumper, page 141
 Adjacent jumper for continuous commoning, page 139
 Push-in type wire jumper, page 140
 TOPJOB®S connector, page 134
 TOPJOB®S L-type test plug module, page 136

Item No.	Pack. Unit
2-conductor fuse terminal block for mini-automotive blade-style fuses,	
with test point, with additional jumper position, without blown fuse indication	
Nominal voltage and current are given by the fuse. Blade-style fuses, please note touchproof protection for 42V and higher.	
● gray	2002-1981 50
Blade-style fuses are not offered by WAGO	
WMB Inline, plain,	
stretchable 5 - 5.2 mm,	
1,500 WMB markers, 5 mm, on roll	
white	2009-115 1
WMB Multi marking system,	
10 strips with 10 markers per card,	
stretchable 5 - 5.2 mm	
plain	793-5501 5
Double-deck marker carrier,	
pivoting	
gray	2002-121 50 (2x25)

Fuse Disconnect Terminal Blocks with Pivoting Fuse Holder and Additional Jumper Position for Miniature Metric Fuses 5 x 20 mm, 2002 Series

0.25 - 2.5 (4) mm ² ① AWG 22 - 12 250 V/6 kV/3 ② I _N 6.3 A Terminal block width 6.2 mm / 0.244 in 	0.25 - 2.5 (4) mm ² ① AWG 22 - 12 250 V/6 kV/3 ② I _N 6.3 A Terminal block width 6.2 mm / 0.244 in 
---	---



- ① Conductor sizes: 0.25 mm² - 4 mm² "s + f-st"; Push-in conductor sizes: 0.75 mm² - 4 mm² "s" and 0.75 mm² - 2.5 mm² "insulated ferrule, 12 mm"
- ② 250 V = rated voltage
6 kV = rated surge voltage
3 = pollution degree
(see Section 14)
- ③ Strip length, see packaging or instructions.
- ④ See application notes for: Push-in type wire jumper, page 140









Item No.	Pack. Unit	Item No.	Pack. Unit
2-conductor fuse disconnect terminal block with pivoting fuse holder, with additional jumper position, for miniature metric fuses 5 x 20 mm, without blown fuse indication Nominal voltage and current are given by the fuse.		2-conductor fuse disconnect terminal block with pivoting fuse holder, with additional jumper position, with blown fuse indication by LED, gray Nominal voltage and current are given by the LED or fuse. Leakage current in case of blown fuse: LED 2 mA	
● gray	2002-1911 50	● 12 - 30 V	2002-1911/1000-541 50
		● 30 - 65 V	2002-1911/1000-542 50
		● 120 V	2002-1911/1000-867
		● 230 V	2002-1911/1000-836 50

Series Item No.	Overload and short circuit protection		Short circuit protection only	
	Individual argmt.	Group argmt.	Individual argmt.	Group argmt.
Fuse terminal blocks				
2002-1911	1.6 W	1.6 W	2.5 W	2.5 W
2002-1911/.....	1.6 W	1.6 W	2.5 W	2.5 W

Protective warning marker and insulation stop must be applied individually. Due to the 6.2 mm/0.244 in width of the fuse terminal blocks with pivoting fuse holder, 2004 Series jumpers must be used.

2002 Series Accessories

Appropriate marking systems: WMB/Marking strips/WMB Inline (see Section 13)

End plate for fuse terminal blocks,  2 mm thick orange 2002-992 100 (4x25) gray 2002-991 100 (4x25)	Push-in type jumper bar, insulated,  I _N 32 A, light gray from 1 to 3 2004-433 200 (8x25) from 1 to 4 2004-434 200 (8x25) from 1 to 5 2004-435 100 (4x25) from 1 to 6 2004-436 100 (4x25) from 1 to 7 2004-437 100 (4x25) from 1 to 8 2004-438 100 (4x25) from 1 to 9 2004-439 100 (4x25) from 1 to 10 2004-440 100 (4x25)
Insulation stop,  5 pcs/strip, 0.25 - 0.5 mm ² light gray 2002-171 200 (8x25)	
Insulation stop,  5 pcs/strip, 0.75 - 1 mm ² dark gray 2002-172 200 (8x25)	
Push-in type jumper bar, insulated,  I _N 32 A, light gray 2-way 2004-402 200 (8x25) 3-way 2004-403 200 (8x25) 4-way 2004-404 100 (4x25) 5-way 2004-405 100 (4x25) 6-way 2004-406 100 (4x25) 7-way 2004-407 100 (4x25) 8-way 2004-408 100 (4x25) 9-way 2004-409 100 (4x25) 10-way 2004-410 100 (4x25)	Push-in type wire jumper,  ④ insulated, I _N 16 A, wire size 1.5 mm ² L = 60 mm 2009-412 100 (10x10) L = 110 mm 2009-414 100 (10x10) L = 250 mm 2009-416 100 (10x10)
	Protective warning marker,  with high-voltage symbol, black, for 5 terminal blocks yellow 2002-115 100 (4x25)
	Test plug,  with 500 mm cable, 2 mm Ø red 210-136 50

When selecting miniature metric fuses, the maximum power loss listed below should not be exceeded. The power loss is determined according to IEC or EN 60947-7-3/VDE 0611-6 at 23 °C. The temperature rise of the terminal blocks must be checked according to their application and mounting. Higher ambient temperatures are an additional burden on fuse cartridges. Therefore, in such applications the rated current must be reduced if necessary. More details available from the manufacturer.