

Wilcoxon Research®

# High temperature general purpose accelerometer HT786A



## Key features


- Hermetically sealed
- ESD-protected
- Reverse wiring protection
- Manufactured in an approved ISO 9001 and AS9100 facility

## Certifications



For applications in which extremely high temperature operation is needed, Meggitt offers the HT-series of accelerometers. Dryer sections of a paper machine regularly create conditions up to 150° C. Vibration monitoring sensors must be capable of operating continuously in hot environments without degradation. HT-series sensors are built with extended range components that are manufactured to withstand high temperatures for long periods of time without failing.

The top-exit Wilcoxon Research® 100 mV/g broadband sensor operates at high temperatures for monitoring machine vibration on a wide range of rotating equipment such as motors, pumps, fans, compressors, turbines and generators. The 316L stainless steel case provides rugged durability for most extreme environments. The sensing element is housed in a case-isolated Faraday shield, providing maximum protection from ground loops and RF interference.

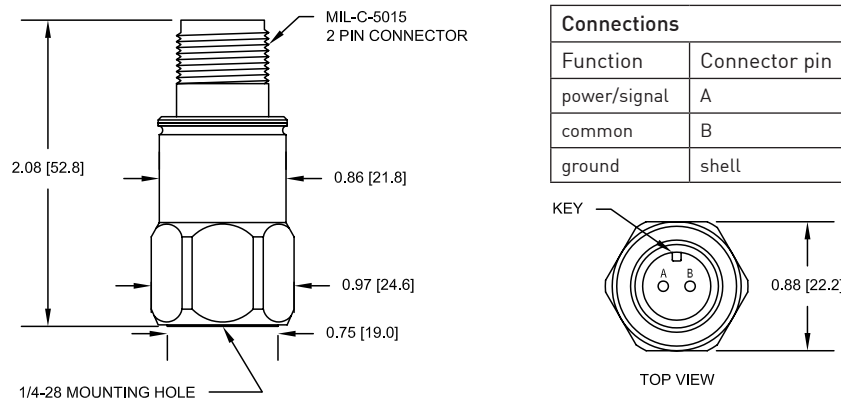

## Meggitt Sensing Systems

### Our energy product competencies and services

Machinery protection | Condition monitoring | Integrated performance monitoring | Partial discharge monitoring | Sensors for extreme environments  
Ignition systems | Flame detection and analysis | Industrial monitoring solutions | Nuclear products

99196 Rev A.1 12/13

**MEGGITT**  
smart engineering for  
extreme environments

Wilcoxon Research®

# High temperature general purpose accelerometer HT786A

## Specifications

	English		Metric		
<b>Sensitivity, ± 5%, 25° C</b>	100 mV/g		9.8 mV/m/sec <sup>2</sup>		
<b>Acceleration range, VDC &gt;25 V</b>	80 g peak		784 m/sec <sup>2</sup>		
<b>Amplitude nonlinearity</b>	1%		1%		
<b>Frequency response</b>	± 5%	180 - 300,000 CPM	3 - 5,000 Hz		
	± 10%	60 - 540,000 CPM	1 - 9,000 Hz		
	± 3 dB	30 - 840,000 CPM	0.5 - 14,000 Hz		
<b>Resonance frequency, nominal</b>	1.80 kCPM		30 kHz		
<b>Transverse sensitivity, max</b>	5% of axial		5% of axial		
<b>Temperature response</b>	-25° C	-10%	-10%		
	+150° C	+15%	+15%		
<b>Voltage source</b>	18 - 30 VDC		18 - 30 VDC		
<b>Current regulating diode</b>	2 - 10 mA		2 - 10 mA		
<b>Electrical noise, equiv g</b>	<b>25° C</b>	<b>150° C</b>	<b>25° C</b>	<b>150° C</b>	
	<b>Broadband 2.5 Hz to 25 kHz</b>	700 µg	1100 µg	6.9 x 10 <sup>-3</sup> m/sec <sup>2</sup>	10.8 x 10 <sup>-3</sup> m/sec <sup>2</sup>
	<b>Spectral</b>				
	<b>10 Hz</b>	10 µg/√Hz	14 µg/√Hz	9.8 x 10 <sup>-5</sup> m/sec <sup>2</sup> /√Hz	13.7 x 10 <sup>-5</sup> m/sec <sup>2</sup> /√Hz
<b>100 Hz</b>	5 µg/√Hz	7 µg/√Hz	4.9 x 10 <sup>-5</sup> m/sec <sup>2</sup> /√Hz	6.9 x 10 <sup>-5</sup> m/sec <sup>2</sup> /√Hz	
<b>1000 Hz</b>	5 µg/√Hz	7 µg/√Hz	4.9 x 10 <sup>-5</sup> m/sec <sup>2</sup> /√Hz	6.9 x 10 <sup>-5</sup> m/sec <sup>2</sup> /√Hz	
<b>Output impedance, max</b>	100 Ω		100 Ω		
<b>Bias output voltage</b>	+25° C	13 VDC	13 VDC		
	+150° C	12 VDC	12 VDC		
<b>Grounding</b>	case isolated,		case isolated,		
	internally shielded		internally shielded		
<b>Temperature range</b>	-58 to +302° F		-50 to +150° C		
<b>Vibration limit</b>	500 g peak		4,900 m/sec <sup>2</sup> peak		
<b>Shock limit</b>	5,000 g peak		49,000 m/sec <sup>2</sup> peak		
<b>Electromagnetic sensitivity, equiv g, max</b>	70 µg/gauss		6.9 x 10 <sup>-4</sup> m/sec <sup>2</sup> /gauss		
<b>Sealing</b>	hermetic		hermetic		
<b>Base strain sensitivity, max</b>	0.0002 g/µstrain		1.9 x 10 <sup>-3</sup> m/sec <sup>2</sup> /µstrain		
<b>Sensing element design</b>	PZT, shear		PZT, shear		
<b>Weight</b>	3.17 oz		90 g		
<b>Case material</b>	316L stainless steel		316L stainless steel		
<b>Mounting</b>	1/4-28 UNF tapped hole		1/4-28 UNF tapped hole		
<b>Mating connector</b>	2 pin, MIL-C-5015 style		2 pin, MIL-C-5015 style		

Accessories supplied: SF6 mounting stud (metric mounting available), calibration data (level 2)

Note: Due to continuous process improvement, specifications are subject to change without notice.

This document is cleared for public release.

## Contact

### Meggitt Sensing Systems

20511 Seneca Meadows Parkway  
Germantown MD 20876, USA  
Tel: +1 (301) 330 8811  
Fax: +1 (301) 330 8873  
wilcoxon@meggitt.com  
www.wilcoxon.com  
www.meggitt.com

## Meggitt Sensing Systems

### Our energy product competencies and services

Machinery protection | Condition monitoring | Integrated performance monitoring | Partial discharge monitoring | Sensors for extreme environments  
Ignition systems | Flame detection and analysis | **Industrial monitoring solutions** | Nuclear products

**MEGGITT**  
smart engineering for  
extreme environments